

WEIGH SCREW FEEDERS


Our weigh screws are U-trough conveyors that are sized for your desired flow rates.

STANDARD FEATURES

- Flanged inlet connection with flexible connector.
- Bolted pitch top cover.
- Flush-end discharge with flexible connector.
- Floor or ceiling mounted frame.
- Single load cell with mounting hardware.
- Medium-duty ball bearings.
- CEMA 2 finish.
- Available in mild or stainless steel.

AVAILABLE SIZES

- 9" or 10" diameter up to a 10' long trough
- 12" or 14" diameter up to 10' long trough

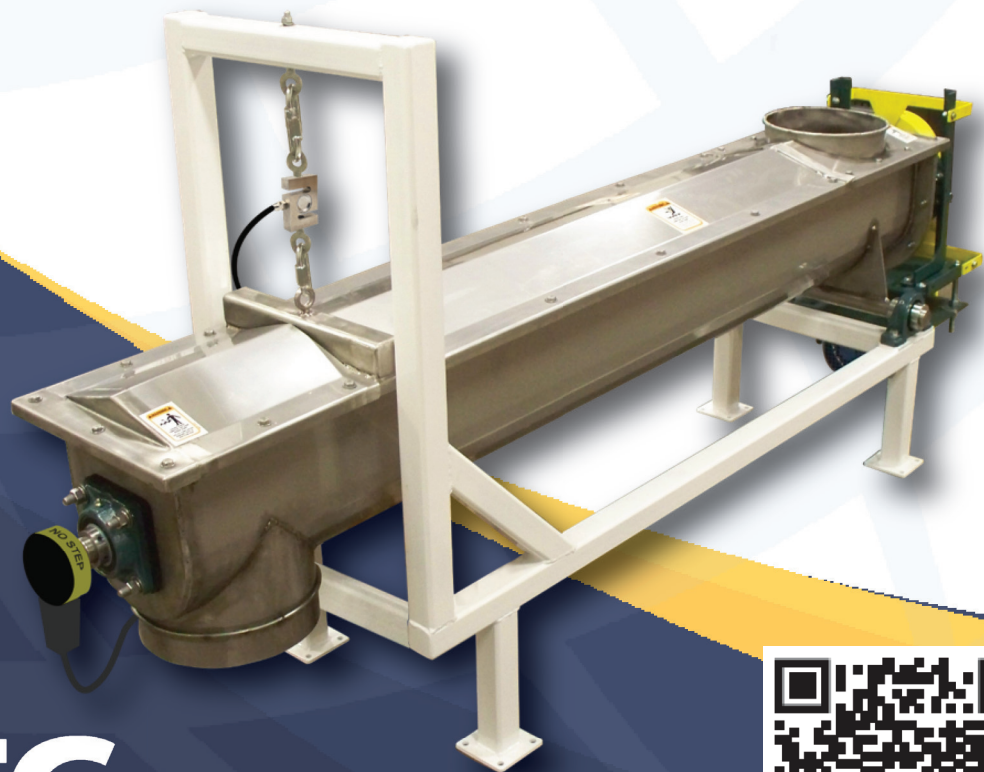

APEC

1201 North Fourth Avenue
Lake Odessa, MI 48849 USA
+1 (616) 374-1000
www.apecusa.com



PROCESSING THE INGREDIENTS FOR YOUR SUCCESS SINCE 1992